

- ▶ 4 functions
- ▶ 8 time ranges
- ▶ 1 change-over contact
- ▶ Suitable for increased ambient temperatures up to 65°C
- ▶ Width 22.5mm
- ▶ Industrial design



## Technical data

### 1. Functions

E	ON delay
R	OFF delay with control contact
Wu	Single shot leading edge voltage controlled
Bp	Flasher pause first

### 2. Time ranges

Time range	Adjustment range	
1s	50ms	1s
10s	500ms	10s
1min	3s	1min
10min	30s	10min
1h	3min	1h
10h	30min	10h
1d	72min	1d
10d	12h	10d

### 3. Indicators

Green LED ON:	indication of supply voltage
Green LED flashes:	indication of time period
Yellow LED ON/OFF:	indication of relay output

### 4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40  
 Mounted on DIN-Rail TS 35 according to EN 50022  
 Mounting position: any  
 Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20  
 Initial torque: max. 1Nm  
 Terminal capacity:  
 1 x 0.5 to 2.5mm<sup>2</sup> with/without multicore cable end  
 1 x 4mm<sup>2</sup> without multicore cable end  
 2 x 0.5 to 1.5mm<sup>2</sup> with/without multicore cable end  
 2 x 2.5mm<sup>2</sup> flexible without multicore cable end

### 5. Input circuit

Supply voltage:	230V AC	terminals A1-A2
Tolerance:	-15% to +10%	
Rated frequency:	48 to 63Hz	
Rated consumption:	230V	4VA(0.6W)
Duration of operation:	100%	
Reset time:	250ms	
Drop-out voltage:	>30% of the supply voltage	

### 6. Output circuit

1 potential free change-over contact	
Switching capacity:	750VA (3A / 250V AC)
Fusing:	3A fast acting
Mechanical life:	20 x 10 <sup>6</sup> operations
Electrical life:	2 x 10 <sup>5</sup> operations
	at 1000VA resistive load
Switching frequency:	max. 60/min at 100VA resistive load
	max. 6/min at 1000VA resistive load (according to IEC 947-5-1)
Insulation voltage:	250V AC (according to IEC 664-1)
Surge voltage:	4kV, overvoltage category III (according to IEC 664-1)

### 7. Control contact

Connections:	not potential free, terminals A1-B1
Loadable:	yes, parallel load min. 1VA
	terminals A2-B1
	max. 10m
Line length:	AC min. 50ms
Control pulse length:	

### 8. Accuracy

Base accuracy:	±1% (of maximum scale value)
Adjustment accuracy:	≤5% (of maximum scale value)
Repetition accuracy:	<1.0% or ±10ms
Voltage influence:	—
Temperature influence:	—

### 9. Ambient conditions

Ambient temperature:	-25 to +65°C (distance > 5mm)
Storage temperature:	-25 to +70°C
Transport temperature:	-25 to +70°C
Relative humidity:	15% to 85% (according to IEC 721-3-3)
Pollution degree:	3 (according to IEC 664-1)


Subject to alterations and errors

## ► Functions

The function has to be set before connecting the relay to the supply voltage.

### ON delay (E)

When the supply voltage U is applied, the set interval t begins (green LED flashing). After the interval t has expired (green LED illuminated) the output relay R switches into on-position (yellow LED illuminated). This status remains until the supply voltage is interrupted. If the supply voltage is interrupted before the expiry of the interval t, the interval already expired is erased and is restarted when the supply voltage is next applied.

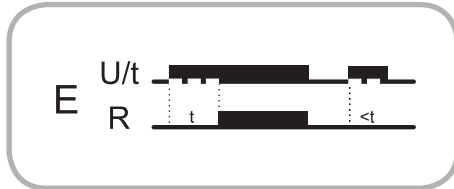


### Off delay with control contact (R)

The supply voltage U must be constantly applied to the device (green LED illuminated).

When the control contact S is closed, the output relay R switches into on-position (yellow LED illuminated). If the control contact is opened, the set interval t begins (green LED flashing). After the interval t has expired (green LED illuminated) the output relay switches into off-position (yellow LED not illuminated).


If the control contact is closed again before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.

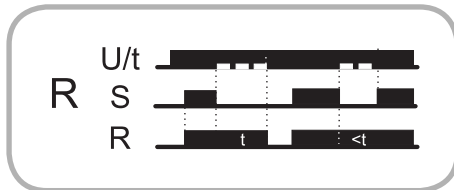

### Single shot leading edge voltage controlled (Wu)

When the supply voltage U is applied, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins (green LED flashing). After the interval t has expired (green LED illuminated) the output relay switches into off-position (yellow LED not illuminated). This status remains until the supply voltage is interrupted.


If the supply voltage is interrupted before the interval t has expired, the output relay switches into off-position. The interval already expired is erased and is restarted when the supply voltage is next applied.

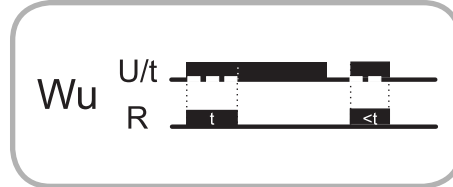


### Flasher pause first (Bp)

When the supply voltage U is applied, the set interval t begins (green LED flashing). After the interval t has expired, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins again. After the interval t has expired, the output relay switches into off-position (yellow LED not illuminated).

The output relay is triggered at a ratio of 1:1 until the supply voltage is interrupted.

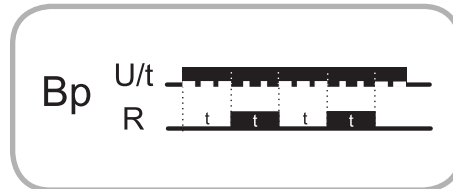

## ► Connections

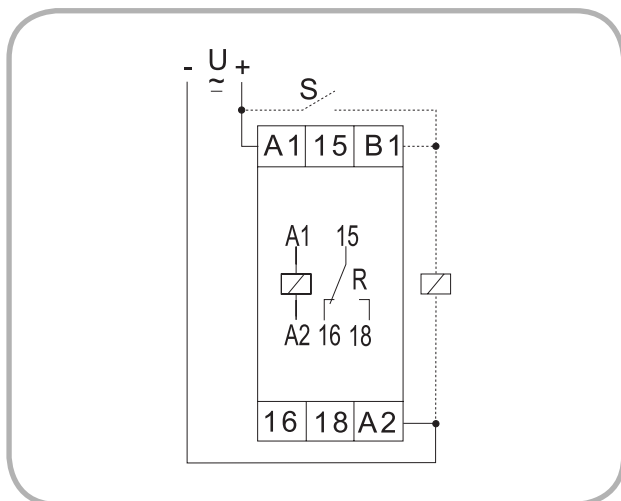

## ► Dimensions

