



Series ENYA

Monitoring of phase sequence and phase failure

Monitoring of asymmetry

Supply voltage = measuring voltage

1 change over contact

Width 17.5 mm

Installation design



Read and understand these instructions before installing, operating or maintaining the equipment.



**Danger!**

Never carry out work on live parts! Danger of fatal injury! The product must not be used in case of obvious damage. To be installed by an authorized person.

## Technical data

### 1. Functions

Voltage monitoring in 3-phase mains. Monitoring of phase sequence, phase failure and asymmetry with adjustable asymmetry.

### 2. Time ranges

Tripping delay: Adjustment range fixed, app. 100 ms

### 3. Anzeigen

Green LED U/t ON: indication of supply voltage  
Yellow LED ON/OFF: indication of relay output

### 4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40  
Mounted on DIN-rail TS 35 according to EN 60715  
Mounting position: any  
Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20  
Tightening torque: max. 1 Nm  
Terminal capacity:  
1 x 0.5 to 2.5 mm<sup>2</sup> with/without multicore cable end  
1 x 4 mm<sup>2</sup> without multicore cable end  
2 x 0.5 to 1.5 mm<sup>2</sup> with/without multicore cable end  
2 x 2.5 mm<sup>2</sup> flexible without multicore cable end

### 5. Input circuit

Supply voltage: (= measured voltage)  
Terminals: L1-L2-L3  
Rated voltage  $U_N$ : 3~ 208V/120V to 480V/277V  
Tolerance: -10% to +10% of  $U_N$   
Rated consumption: 10VA (1W) @ 400V / 50Hz  
16VA (1,5W) @ 480V / 60Hz  
a.c. 48 to 63Hz  
Rated frequency: a.c. 48 to 63Hz  
Duty cycle: 100%  
Reset time: 500 ms  
Hold-up time: -  
Drop out voltage: >20% of the supply voltage  
Overvoltage category: III (in accordance with IEC 60664-1)  
Rated surge voltage: 4 kV

### 6. Output circuit

1 potential free change over contact  
Rated voltage: 250V a.c.  
Switching capacity: 1250VA (5A / 250V a.c.)  
Fusing: 5A fast acting  
Mechanical life: 20 x 10<sup>6</sup> operations  
Electrical life: 2 x 10<sup>5</sup> operations  
at 1000VA resistive load  
Switching frequency: max. 6/min at 1000VA resistive load  
(in accordance with IEC 60947-5-1)  
Overvoltage category: III (in accordance with IEC 60664-1)  
Rated surge voltage: 4kV

### 7. Measuring circuit

Measuring variable: 3~, Sinus, 48 to 63 Hz  
Measuring input: (= supply voltage)  
Terminals: L1-L2-L3  
Overload capacity: determined by tolerance specified for supply voltage  
Input resistance: -  
Asymmetry: 5% ... 25%  
Overvoltage category: III (in accordance with IEC 60664-1)  
Rated surge voltage: 4 kV

### 8. Accuracy

Base accuracy: ≤5%  
Adjustment accuracy: ≤5%  
Repetition accuracy: ±2%  
Voltage influence: -  
Temperature influence: ≤0.05% / °C

### 9. Ambient conditions

Ambient temperature: -25 to +55°C  
at operating frequencies >50Hz and ambient temperatures above 40°C a side distance to other units of 5mm must be observed.  
Storage temperature: -25 to +70°C  
Transport temperature: -25 to +70°C  
Relative humidity: 15% to 85%  
(in accordance with IEC 60721-3-3 class 3K3)  
Pollution degree: 2 (in accordance with IEC 60664-1)


### 10. Weight

Single packing: 72 g  
Packing of 10pcs: 670 g per package

## Functions


### Phase sequence monitoring

When all the phases are connected in the correct sequence and the measured asymmetry is less than the set value, the output relay switches into on-position (yellow LED illuminated).  
When the phase sequence changes, the output relay switches into off-position (yellow LED not illuminated).

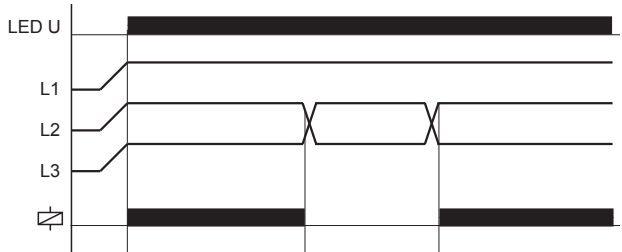


### Asymmetry monitoring

As soon as the asymmetry exceeds the value at the ASYM-regulator, the output relay R switches into off-position (yellow LED not illuminated). Reverse voltages of a consumer (e.g. a motor which continues to run on two phases only) do not effect the disconnection.

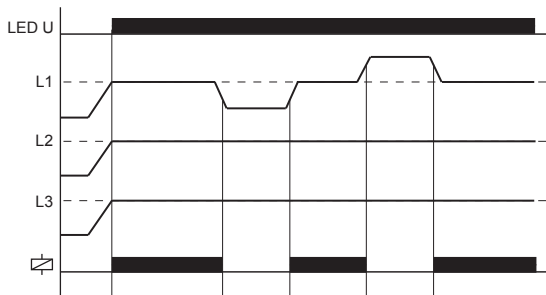


### Phase failure monitoring


As soon as one of the three phases fails, the output relay R switches into off-position (yellow LED not illuminated).

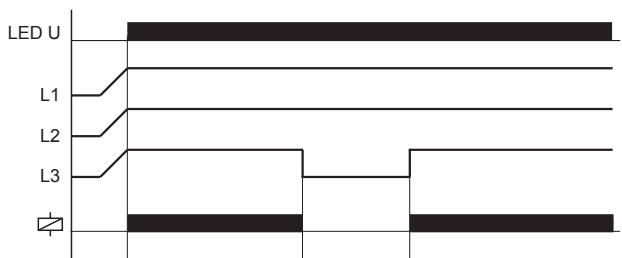

## Connections

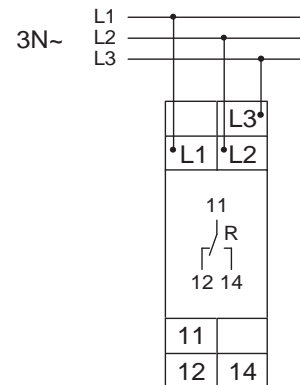

## Dimensions

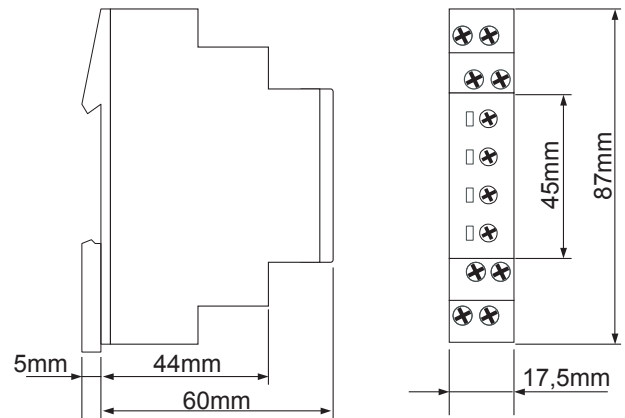

## Ordering information

Types	Rated voltage $U_N$	Switching threshold	Part No.
E1PF480Y/277VSY01	3~480/277V	Asymmetry 5%...25%	1340306

TELE Haase Steuergeräte Ges.m.b.H.  
Vorarlberger Allee 38  
A-1230 Wien

RELEASE 2011/07

Subject to alterations and errors

**tele**  
Technik Braucht Kontrolle