

- ▶ Front panel mounting
- ▶ Mounting aperture 46 x 46mm
- ▶ Without zero reset



## ▶ Technical data

### ▶ 1. Indicators

Counter capacity:	999 999h
Accuracy of reading:	0.1h
Numeral colour:	white, decimal figures red
Numeral height:	4.4mm
Operation indicator:	fast-running wheel

### ▶ 2. Mechanical design

Self-extinguishing plastic housing, IP rating IP50 (on the front, with sealing ring IP54)  
Class of protection III (up to 48V DC)  
Front panel mounting  
Shockproof universal connection according to VBG 4  
(terminals IP rating IP20 / AMP plug-type connections 6.3 x 0.8mm)  
Initial torque: max. 2.4Nm  
Terminal capacity: cylinder head bolt M3x5, DIN 84

### ▶ 3. Input circuit

Supply voltage:	12 to 48V DC
Tolerance:	±10%
Rated consumption:	12V DC approx. 20mW


### ▶ 4. Ambient conditions

Ambient temperature:	-10 to +50°C
Storage temperature:	-10 to +50°C
Transport temperature:	-10 to +50°C
Relative humidity:	<90%


### ▶ 5. Accessories

DR-TBW40:	Sealing ring increases IP rating up to IP54
SB-TBX40:	Retaining clip for fixing the device in front panel

B55-TBX40: Trim 55 x 55mm

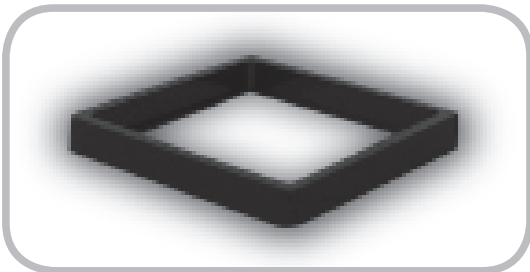

ME72-TBX40: Mask 72 x 72mm

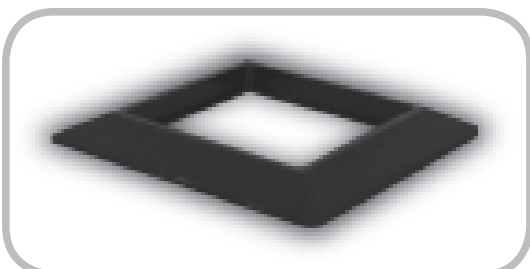

## ► Dimensions

