

CT36R

Multifunction | 24 ... 48 V UC | 110 ... 240 V UC

Time data

Timing functions	I, P	
Timing range	600 ms / 6 s / 60 s / 6 min / 60 min / 60 h	
Timing scale	50 ms ... 60 h	

Control circuit

Nominal voltage	24 ... 48 V UC	110 ... 240 V UC
Operating voltage range	19 ... 60 V	82 ... 265 V
Power consumption AC / DC	0.3 VA / 0.3 W	1 VA / 1 W

General data

Ambient temperature storage	-40 ... 85 °C
Ambient temperature operation railway version	-40 ... 70 °C
Module width	fig. 2
Weight	25 g
Protection degree	IP 20
Housing material	PC

Product references

Types	Product reference	24-48	110-240
UC supply	CT36R/UC...V	✓	✓

“...” list control circuit voltage to complete product references.
Other voltages on request. Please contact support@comatreleco.com.

Accessories


Sockets	S3-M0, S5-M
Transparent front cover	FS-C



fig. 1. Wiring diagram



fig. 2. Dimensions (mm)

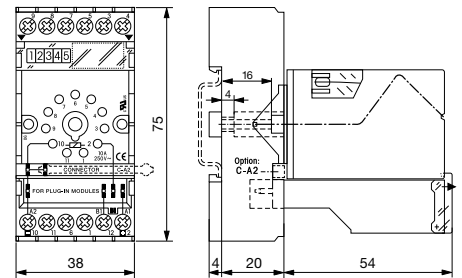

Standards and approvals

Standards IEC/EN 50155

Approvals CE EAC cULus