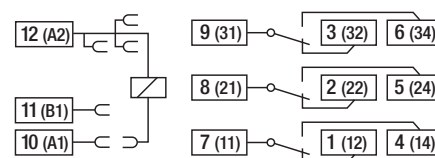
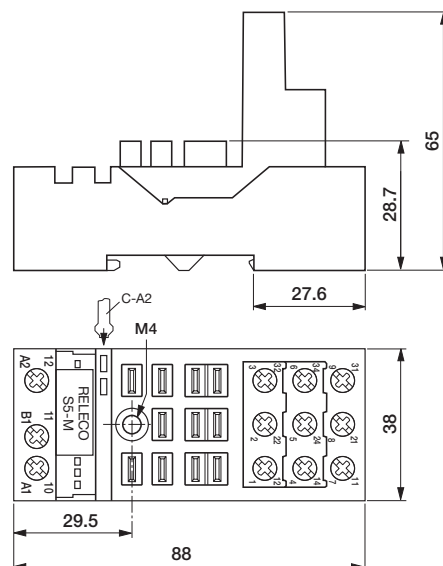


<b>Type:</b>	<b>S5-M</b> 3-pole, 3 level Module slot for timer- and monitoring modules, over voltage suppressing- and LED indicator modules coil bridge bus bar to connect in A2
<b>Rated current</b>	<b>16 A</b>
<b>Specifications</b>	
Rated load	16 A / 400 V
Insulation	Test voltage $V_{rms}$ / 1 min
– All terminal/DIN rail	4 kV
– Terminal/terminal	4 kV
Cross section of connecting wire	
– Single wire	1 x 6 mm <sup>2</sup> , 2 x 2,5 mm <sup>2</sup>
– Multi wire	1 x 6 mm <sup>2</sup> /AWG10, 2 x 1,5 mm <sup>2</sup> /AWG16
Max. screw torque	1 Nm
Screw dimensions	M3,5, Pozi, slot
Integrated retaining clip/plastic	for relay series C5
Labelling space	detachable
Connection label	1 ... 12, DIN/EN
Mounting	DIN rail TS35 or panel mounting 1 x M4
Ambient temperature operation / storage	-40 (no ice) ... 60° C/-40 ... 80° C
Weight	92g
<b>Associated, plug-in 11-pin MRC relays</b>	<b>C5-A, C5-G, C5-X, C5-M, C5-R</b>

**Accessories**

Coil bridge bus bar	<b>C-A2</b>
Retaining clip, plastic	<b>S5MCP</b>

**Connection diagram****Dimensions [mm]****Technical approvals, conformities**