



Type	S12 I/O socket for C12 relays with 2 x CO Logic connection , 5 A
Rated current	5 A
Specifications	<p>Rated load 5 A / 250 V</p> <p>Insulation Test voltage V rms / 1 min 5 kV</p> <p>Contacts terminals 2,5 kV</p> <p>Contacts / Coil terminals 5 kV</p> <p>Cross-section of connecting wire</p> <ul style="list-style-type: none"> – Single-wire 4 mm² or 2 x 2,5 mm² – Multi-wire 22 - 14 AWG <p>Max. screw torque 0.7 Nm</p> <p>Screw dimensions M3, Pozi, slot</p> <p>Integrated retaining clip/plastic for relay series C12 (CP-17B)</p> <p>Labelling space detachable</p> <p>Connection label 1...9; DIN/EN</p> <p>Mounting DIN rail TS35 or mounting plate</p> <p>Ambient temperature operation/storage -40 (no ice)...60 °C / -40 ... 80 °C</p> <p>Weight 31g</p>




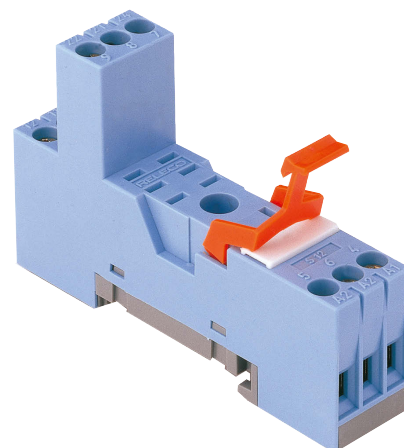


Socket for IRC relays	C12, C12G
Accessories	V10-G, V40-G, V10-R, V40-R, V10-A, V40-A B20-G, B20-R, B20-A, CP-07B CP-17B
Coil bridge bars	
Retaining clip, plastic	

Connection diagram

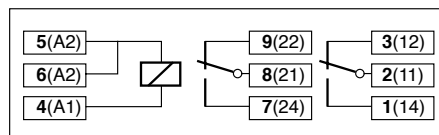

Dimensions [mm]

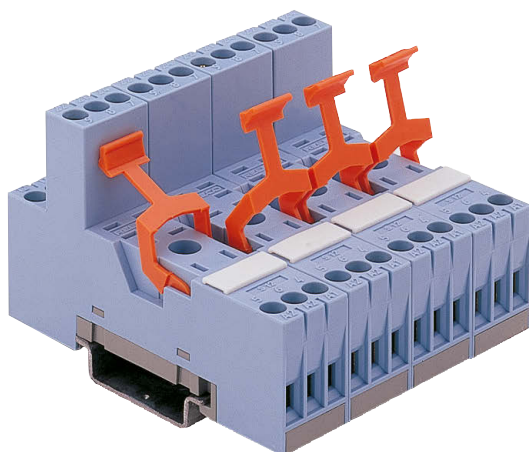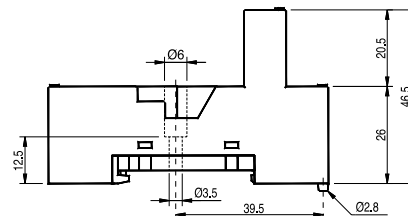

Technical approvals, conformities



IEC 61810 EN 60947