
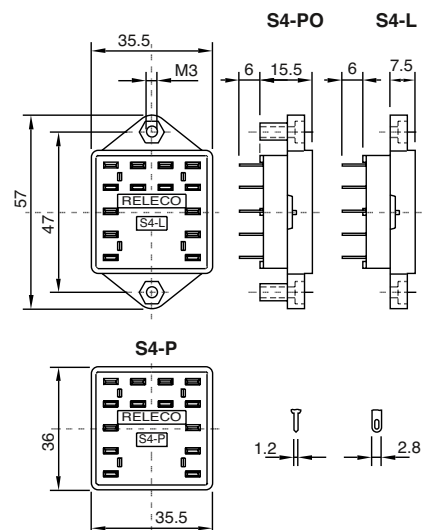


<b>Type</b>	<b>S4-L</b> 4-pole, flange panel mountable
	<b>S4-P</b> 4-pole, printed circuit
	<b>S4-PO</b> 4-pole, printed circuit with flange
<b>Rated current</b>	<b>10 A</b>
<b>Specifications</b>	
Rated load	10 A / 250 V
Test voltage benachbarte Pole	2.5 kV rms 1 min
Ambient temperature	-30 °C ... +60 °C
Weight	21g
<b>Accessories</b>	
Retaining spring, steel	<b>S4-CL</b>

**Printed circuit lay-out [mm]****Dimensions [mm]****Technical approvals, conformities**

EN 60947-1, EN 61810-1