
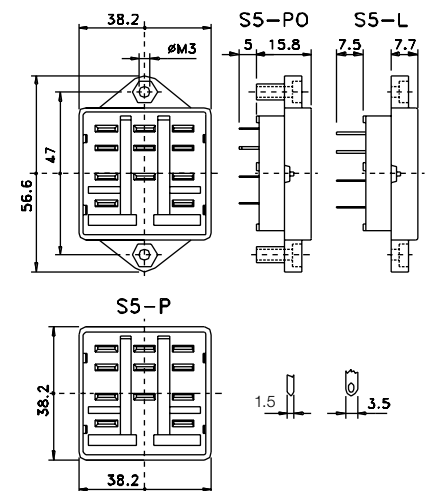


Type	S5-L 3-pole, flange panel mountable
	S5-P 3-pole, printed circuit
	S5-PO 3-pole, printed circuit with flange
Rated current	16 A
Specifications	
Rated load	16 A / 400 V (UL: 300 V)
Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C
Weight	20g
Accessories	
Retaining spring, steel	S4-CL

**Printed circuit lay-out [mm]****Dimensions [mm]****Technical approvals, conformities**

EN 60947-1, EN 61810-1