


Type	S9-L 4-pole, flange panel mountable
	S9-P 4-pole, printed circuit
	S9-PO 4-pole, printed circuit with flange
Rated current	6 A

Specifications	
Rated load	6 A / 250 V
Dielectric strength adjacent pin	2.5 kV rms / 1 min
Connection label	1...14; DIN/EN
Integrated retaining clip/plastic	for relay series C9 S9-P: (CP-07B) S9-L + S9-PO: (CP-01B)
Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C
Weight	12g


Accessories	
Retaining clip, plastic for S9-P	CP-07B
Retaining clip, plastic for S9-L + S9-PO	CP-01B



Printed circuit lay-out [mm]

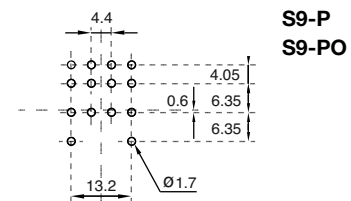

Dimensions [mm]

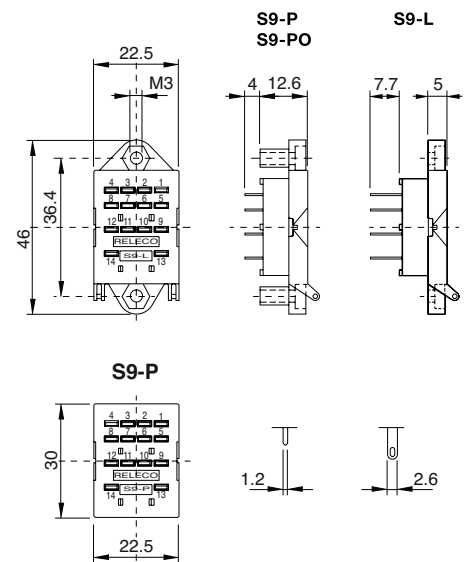

Sockets 4.0

4

Technical approvals, conformities



EN 60947-1, EN 61810-1