

Modular transformers

TMC


Modular TMC transformers for continuous service.




- 1 Insulation transformers where the primary and secondary coils are electrically separated by a double insulation that minimises any damage, in the powered circuit, caused from accidental contact with the electrically active parts or earth that may become powered in case of failure of the insulation
- 2 Safety transformers designed to power supply very low safety voltage devices and circuits (SELV type systems)
- 3 "Fault-proof" insulation transformers
The condition of overload or of short circuit may damage the device but does not create a condition of hazard for the users or the nearby parts

DIMENSIONS (mm)


TMC 10/12
TMC 10/24
TMC 15/12
TMC 15/24




TMC 24/24
TMC 30/24




TMC 40/24

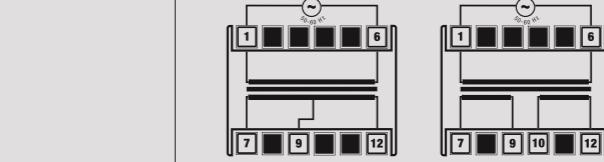


TMC 63/24
TMC400 63/24

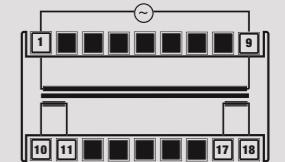


Front view

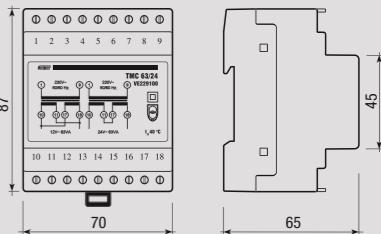


Front view

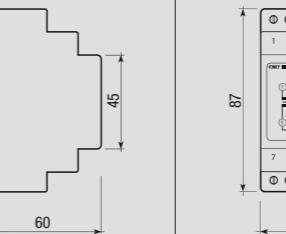


Side view

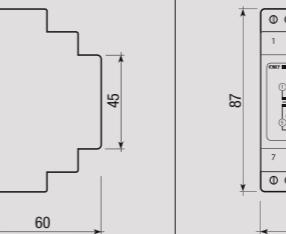


Side view

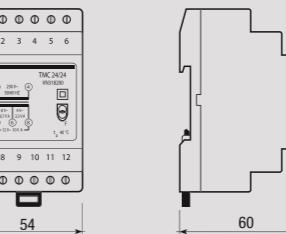

Front view

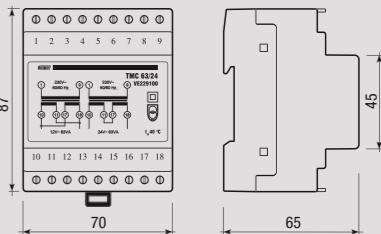

Side view

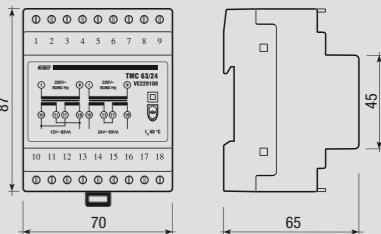

GAS AND SAFETY

CONTINUOUS SERVICE

- Modular safety transformers with double insulation
- Primary voltage: 230 V or 400 V (TMC400 63/24)
- Secondary voltage available values: 4-8-12-24 V
- Power available values: 10-15-24-30-40 and 63 VA
- Dimensions: 2, 3 or 4 DIN modules depending on the power
- Connection diagram reported on the product
- Testing and dielectric rigidity trials (3.75 kV) on each apparatus
- Protection against short-circuit (TMC 63/24 and TMC400 63/24)



TECHNICAL INFORMATION

GENERAL CHARACTERISTICS

Primary voltage (see code table)	V AC	230 (-10 ÷ +10%)
		400 (-10 ÷ +10%)
Frequency	Hz	50 / 60
Device class		II
Container		Self-extinguishing thermoplastic material (class VO), RAL-7035
Maximum ambient temperature	°C	40
Cable max. section	mm ²	4

(**) In TMC 40/24, TMC 63/24 and TMC 400 63/24 models, the 12 V secondary voltage is available with half of the rated power from every coil, or with the maximum power if the 2 coils are connected in parallel.

Code	Model	Description	Power	Prim. voltage	Sec. voltage (*)	Dimensions
VN314100	TMC 10/12	Modular transf.	10 VA	230 V AC	4-8-12 V AC	2 DIN modules
VN315800	TMC 10/24	Modular transf.	10 VA	230 V AC	12-24 V AC	2 DIN modules
VN316600	TMC 15/12	Modular transf.	15 VA	230 V AC	4-8-12 V AC	2 DIN modules
VN317400	TMC 15/24	Modular transf.	15 VA	230 V AC	12-24 V AC	2 DIN modules
VN318200	TMC 24/24	Modular transf.	24 VA	230 V AC	12-24 V AC	3 DIN modules
VN319000	TMC 30/24	Modular transf.	30 VA	230 V AC	12-24 V AC	3 DIN modules
VN320800	TMC 40/24	Modular transf.	40 VA	230 V AC	12-24 V AC	3 DIN modules
VE229100	TMC 63/24	Modular transf.	63 VA	230 V AC	12-24 V AC	4 DIN modules
VE303400	TMC400 63/24	Modular transf.	63 VA	400 V AC	12-24 V AC	4 DIN modules

(*) The secondary voltage, without load and in case of loads with high impedance, is higher than nominal

Continuous service transformers	
TMC 10/12	TMC 15/12
Connection terminal	Voltage
5-6	8 V ~ 6,7 VA
6-8	4 V ~ 3,3 VA
5-8	12 V ~ 10 VA
	8 V ~ 10 VA
	4 V ~ 5 VA
	12 V ~ 15 VA
TMC 10/24	TMC 15/24
Connection terminal	Voltage
5-6	12 V ~ 5 VA
6-8	12 V ~ 5 VA
5-8	24 V ~ 10 VA
	12 V ~ 7,5 VA
	12 V ~ 7,5 VA
	24 V ~ 15 VA
TMC 24/24	TMC 30/24
Connection terminal	Voltage
7-9	12 V ~ 12 VA
9-12	12 V ~ 12 VA
7-12	24 V ~ 24 VA
	12 V ~ 15 VA
	12 V ~ 15 VA
	24 V ~ 30 VA
TMC 40/24	
Connection terminal	Voltage (**)
7-9	12 V ~ 20 VA
10-12	12 V ~ 20 VA
7-12	24 V ~ 40 VA

Continuous service transformers	
TMC 63/24	TMC400 63/24
Connection terminal	Voltage (**)
10-11	12 V ~ 31,5 VA
17-18	12 V ~ 31,5 VA
10-18	24 V ~ 63 VA
	12 V ~ 31,5 VA
	12 V ~ 31,5 VA
	24 V ~ 63 VA