


DDC30S-10-65



- Surge protector for DC supplies 1-pole
- Type 1 + 2
- In: 15 kA / I_{max}: 30 kA
- I_{imp}: 4kA
- Pluggable module
- Remote signaling
- prIEC 61643-41 compliance

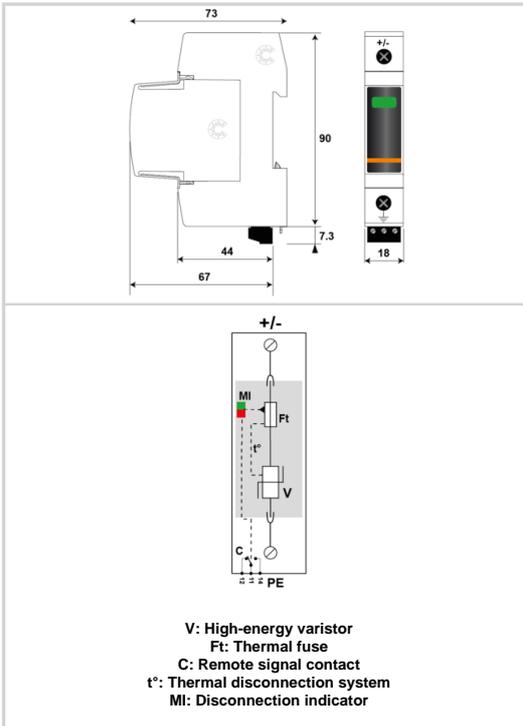

Electrical Characteristics	
SPD type (following IEC tests)	1+2
Nominal DC voltage	Un-dc 48 Vdc
Max. AC operating voltage	Uc 50 Vac
Max. DC operating voltage	Uc 65 Vdc
Residual Current (Leakage current to Ground)	I _{pe} < 0.1 mA
Follow current	I _f None
Nominal discharge current (15 x 8/20 μs impulses)	I _n 15 kA
Max. discharge current (max. withstand @ 8/20 μs by pole)	I _{max} 30 kA
Impulse current by pole (max. withstand 10/350μs by pole)	I _{imp} 4 kA
Connection mode(s)	+/PE or -/PE
Protection level +/PE (-/PE)(@ I _n (8/20μs))	U _p 300 V / -
Admissible short-circuit current	I _{sc} 50 000 A
Mechanical Characteristics	
Technology	MOV
SPD configuration	1-pole
Connection to Network	Screw terminals: 2.5-25 mm ² +/- : 1.5-10 mm ²
Pluggable	Yes
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	T _u -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from network
Disconnection indicator	1 mechanical indicator - Red/Green
Spare module(s)	MDDC30-65
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram - 1TE (EN43880)
Weight	0.096 kg
Disconnectors	
Thermal disconnecter	Internal
Fuses	50 A mini. - 125 A max. - Fuses Type gG
Standards	
Standards compliance	prIEC 61643-41
Part number	
828110121	

