

S5-SSY

Socket for 11-pin Relays

Rated Load **16 A / 400 V**

Specifications


Rated impulse withstand voltage	4 kV rms / 1 min
– All terminals / DIN rail	4 kV rms / 1 min
– Terminal / Terminal	4 kV rms / 1 min
Cross-section of connecting wire	
– Single-wire	1 x 6 mm ² / AWG 10, 2 x 2.5 mm ² / AWG 14
– Multi wire	1 x 6 mm ² / AWG 10, 2 x 1.5 mm ² / AWG 16
Nominal screw torque	1 Nm
Screw Dimensions (mm)	M3.5 Pozi slot
Mounting	TS-35 or Back Panel Mounting
Ambient temperature operation / storage	-40 ... 60° C / -40 ... 80° C (no ice)
Weight	92g

Integrated Accessories


A2-Connector	C-A2
Retaining clip, plastic	S5M-CP for C5 / C5x Relays
A1-, B1-Connector	SC-3

Optional Accessories



Retaining Clip, steel	HF-32 (BAG 10 PCS) for C5 / C5x Relays
A2-Connector	C-A2 (BAG 5 PCS), C-A2 (BAG 50 PCS)
A1-, B1-Connector	SC-3 (BAG 10 PCS)

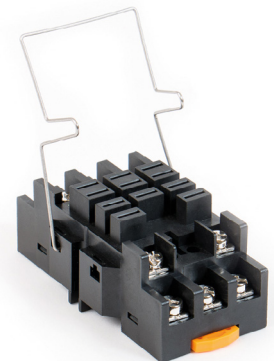

Connection diagram

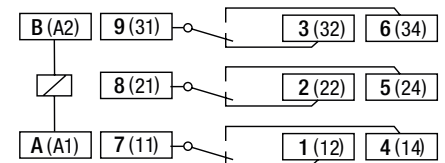

Dimensions (mm)

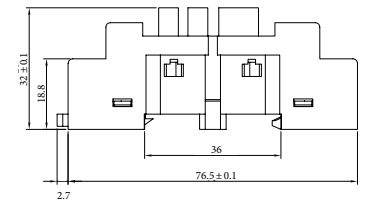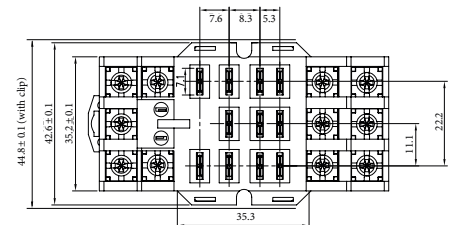

Technical approvals, conformities

