

## RBC-AUX

**4 A auxiliary contact bloc with 2 double contacts,  
2 different combinations of NO / NC contacts**



**Type: RBC AUXxx**

2 double contacts, 2 NO, 1 NC-1 NO types available

<b>Maximum contact load AC-15</b>	<b>4 A / 230 V</b>
<b>Recommended minimum contact load</b>	<b>5 mA / 12 V</b>

**Contacts**

Material	AgNi
Rated operational current AC-15	4 A / 230 V
Max. switching voltage	250 V

**Insulation**

Rated insulation voltage	250 V
Rated impulse withstand voltage	4 kV

**Specifications**


Ambient temperature storage / operation	-30 ... 80 °C / -25 ... 55 °C
Operating frequency at rated load	≤ 600 operations / h
Conductor cross section	Stranded wire 4 mm <sup>2</sup>
Max. Screw torque	0.8 Nm
Ingress protection degree	IP 20
Weight	30 g

**Standard types**


<b>2NO</b>	<b>RBC-AUX20</b>
<b>1NO + 1NC</b>	<b>RBC-AUX11</b>



**Connection diagram**



**Dimensions [mm]**

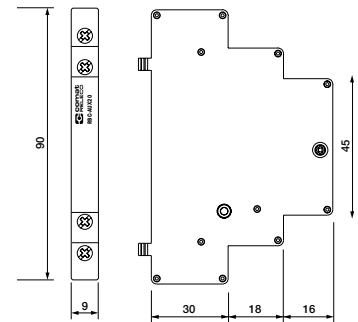

**Technical approvals, conformities**

**CE** **RoHS**  
2006/95/EC  
IEC/EN 60947-4-1  
IEC/EN 60947-5-1  
IEC/EN 61095