



|                                       |                                                                     |
|---------------------------------------|---------------------------------------------------------------------|
| <b>Type</b>                           | <b>S9-M</b><br>4-pole, 2 level<br>Integrated clip and marking label |
| <b>Rated current</b>                  | <b>6 A</b>                                                          |
| <b>Specifications</b>                 |                                                                     |
| Rated load                            | 6 A / 250 V                                                         |
| Insulation                            | Test voltage V rms / 1 min                                          |
| - All terminals/DIN rail              | 2,5 kV                                                              |
| - Terminal/terminal                   | 2,5 kV                                                              |
| Cross-section of connecting wire      |                                                                     |
| - Single-wire                         | 4 mm <sup>2</sup> or 2 x 2,5 mm <sup>2</sup>                        |
| - Multi-wire                          | 22 - 14 AWG                                                         |
| Max. screw torque                     | 0.7 Nm                                                              |
| Screw dimensions                      | M3, Pozi, slot                                                      |
| Integrated retaining clip/plastic     | for relay series C9 (CP-01B)                                        |
| Labelling space                       | detachable                                                          |
| Connection label                      | 1...14; DIN/EN                                                      |
| Mounting                              | DIN rail TS35 or mounting plate                                     |
| Ambient temperature operation/storage | -40 (no ice)...60 °C / -40 ... 80 °C                                |
| Weight                                | 54g                                                                 |

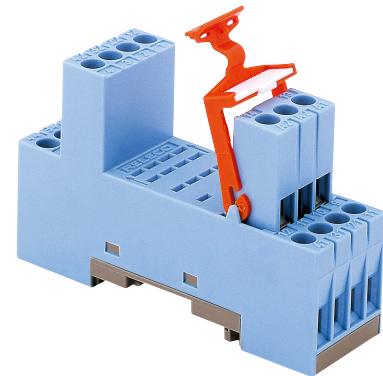





|                                       |                         |
|---------------------------------------|-------------------------|
| <b>Socket for 4 poles, QRC relays</b> | <b>C9-A, C9-E, C9-R</b> |
|---------------------------------------|-------------------------|

|                         |               |
|-------------------------|---------------|
| <b>Accessories</b>      | <b>CP-01B</b> |
| Retaining clip, plastic |               |

**Connection diagram**

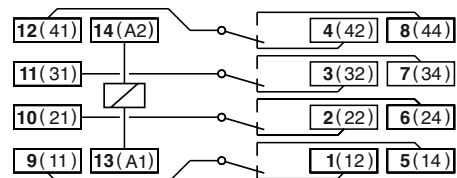

**Dimensions [mm]**

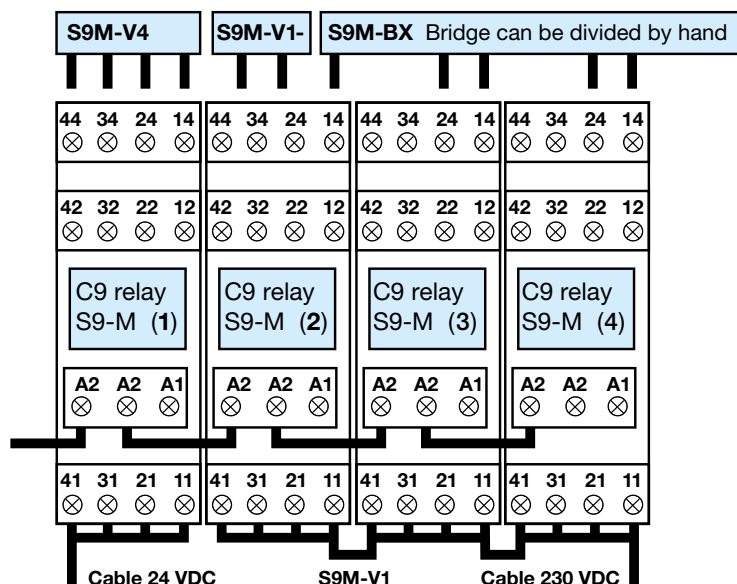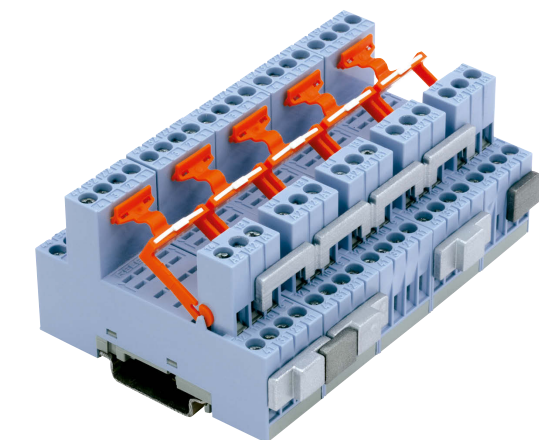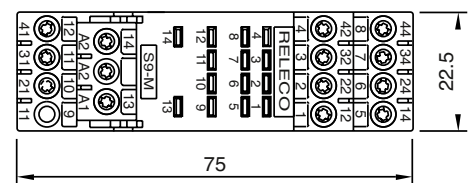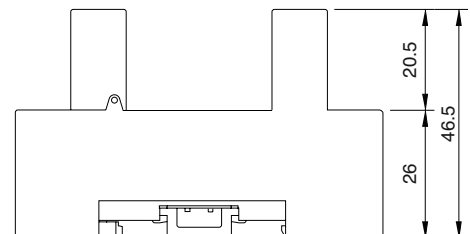

**Technical approvals, conformities**



EN 60947-1, EN 61810-1